
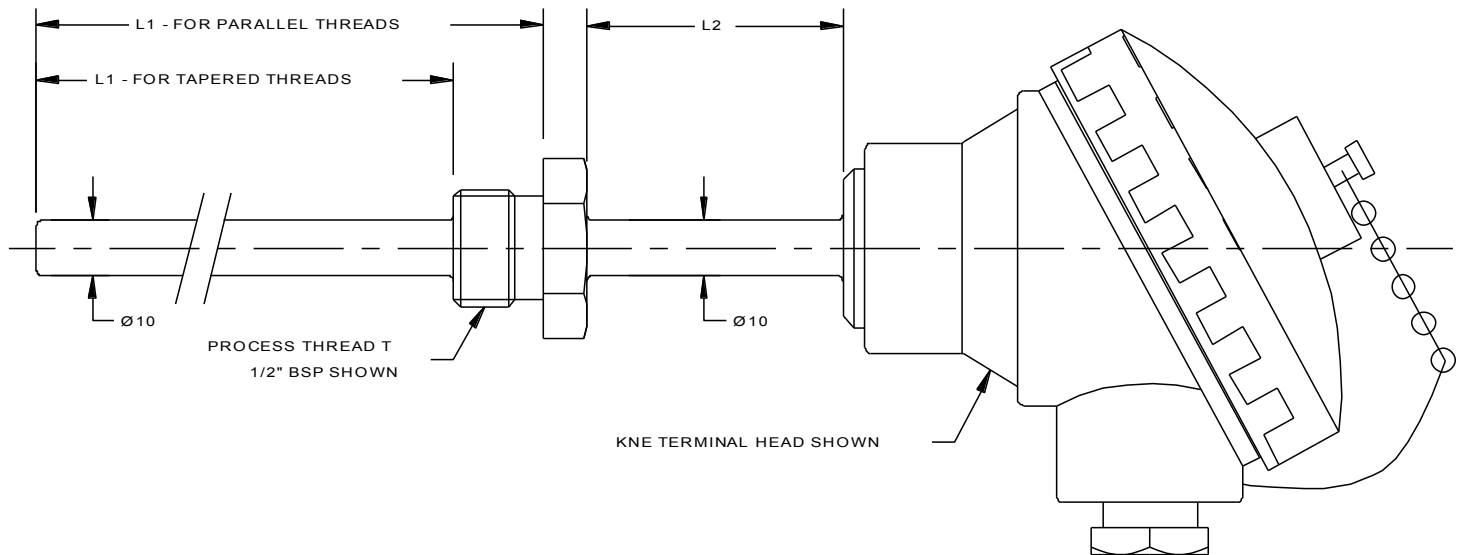


PPL8-T

Thermocouple with Pocket and Spring Loaded DIN Insert

- Sensor with Pocket and Insert
- Stainless Steel Pocket Fitted into the Terminal Head
- Separate Spring Loaded Insert fitted inside Head
- Easy Sensor Withdrawal / Replacement
- Immersion Lengths and Process Connections manufactured to your requirements.
- Choice of terminal block or transmitter options.

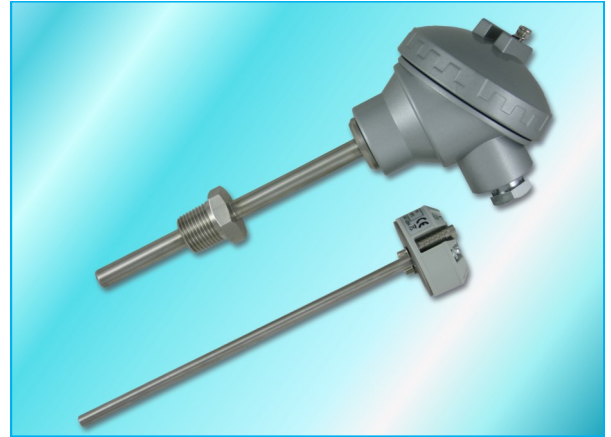

Specifications

Sensor Type	Type J, K or T thermocouple. Other types available, please enquire.
Operating Range	-50 to 250°C (Unless Otherwise Requested)
Sheath Material	316 stainless steel
Tolerance Band	BS EN 60584-2:1993 Class 1 or Class 2
Wiring System	Simplex or Duplex
Lead Types	A - KNE Aluminium Alloy, IP68 B - KSE Aluminium Alloy, IP68 C - ABS, IP67 D - Glass Filled Nylon, IP65 E - 316 stainless steel, IP68 (Other heads available upon request)
Head Options	A - Ceramic Terminal Block B - In Head Transmitter—Various types available C - Tails for Customers Own Transmitter

Process Parameters Ltd

Unit 10A, Waldeck House, Waldeck Road, Maidenhead, Berkshire, SL6 8BR

Tel: 01628 778688


Fax: 01628 777714

Email: sales@processparameters.co.uk

Web: www.processparameters.co.uk

PPL8-T

Thermocouple with Pocket and Spring Loaded DIN Insert

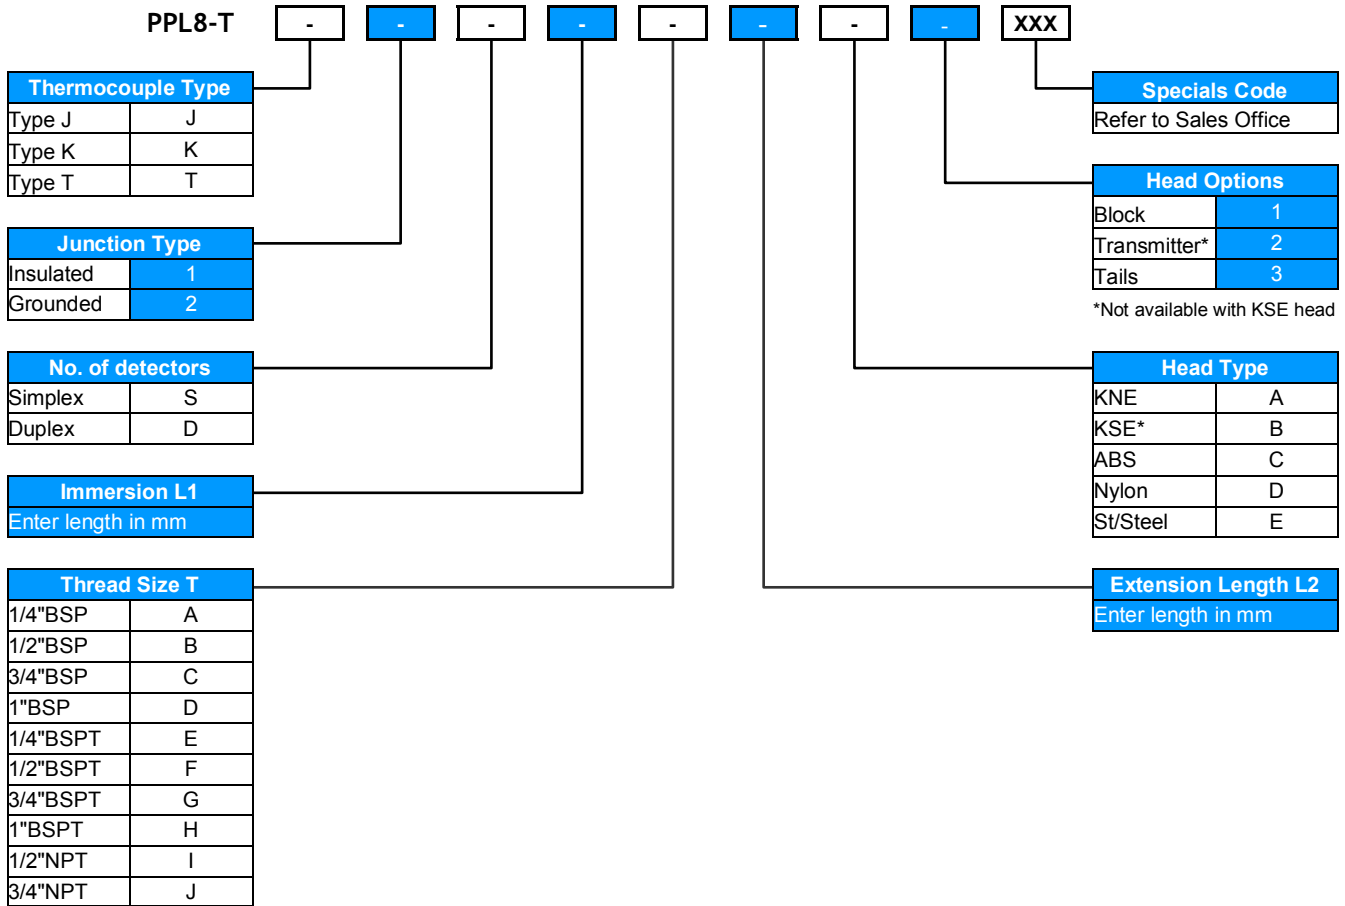

NOTE: Some option combinations not possible.

This data sheet gives details of the most popular options available for this type of sensor but is not intended to give an exhaustive list of possibilities. If you have a special requirement please do not hesitate to contact our sales office for assistance.

Accessories for your sensor...



Compression Fittings



Signal Conditioners



Pockets / Thermowells



Extension Cables

Process Parameters Ltd

Unit 10A, Waldeck House, Waldeck Road, Maidenhead, Berkshire, SL6 8BR

Tel: 01628 778688

Fax: 01628 777714

Email: sales@processparameters.co.uk

Web: www.processparameters.co.uk